

Product Specification

Model: DQ115

Rated Power: 2W

Input: DC5.0V/1.0A

Weight: 138g

Tank capacity: 100ml

Product Size: 8.4 x 6 x 7.6cm


Raw Material: ABS/PP/PCBA

Standard Sheet: Q/DQDZ 1-2017

Made in China

Product Diagram

- ① Fuselage
- ② Induction window
- ③ Spray nozzle
- ④ Tank
- ⑤ Switch
- ⑥ Type-C
- ⑦ Indicator light

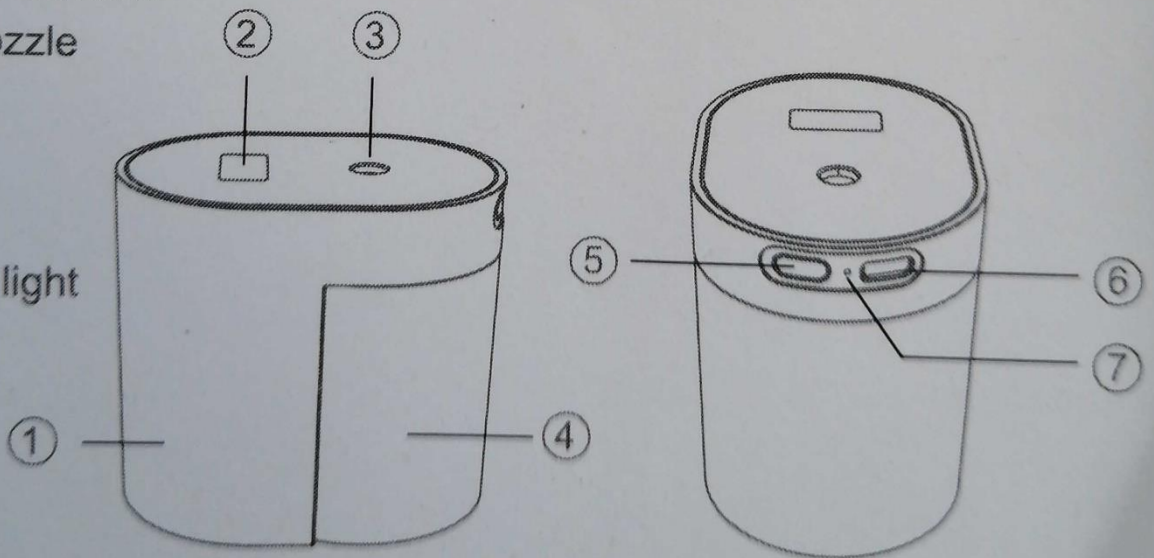

Product contents: SterilizerX1 ManualX1 Type-C cableX1 Spare cotton coreX1

Instructions

1. Unscrew the water tank, and add 75% alcohol of no more than 4/5 of the volume capacity. Then install back the water tank.
2. Press the switch button to turn on. A blue indicator will light within 3 seconds. Then press switch button to turn off.
3. Place your hand 0-12 cm above the induction window. After 10 seconds of use, the spray will automatically stop.
4. If not in used for more than 24 hours, it will automatically shut down.
5. Use the DC 5V1A adaptor to charge.

Charging: red light indicator

Full charge: green light indicator

Notice

- Do not immerse the product in liquid.
- Place it away from heat source, radiator, heater or other heat generating equipment.
- The principle of the product is microporous atomization. It is recommended to use 75% alcohol and avoid oil based liquid, strong acid or other types of liquid.
- Keep away from fire sources to avoid fire.
- Do not disassemble or repair the product.